


Lowbay Light

Product Code
ARCIL1A60W220V



IP rating	65
Ik rating	8
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>90
Step McAdam	3
Source flux	7200 lm
Source efficiency	120 lm/W
Delivered flux	6000lm
Delivered efficiency	100 lm/W
Input power	60W
Supply voltage	AC220V
Insulation Class	insulation class III
Power supply	constant current driver
Material	Aluminium
CCT	4000K
Beam angle	120°
Mounting	unground-recessed
Reflector color	white
Finishing	black

Technical drawing

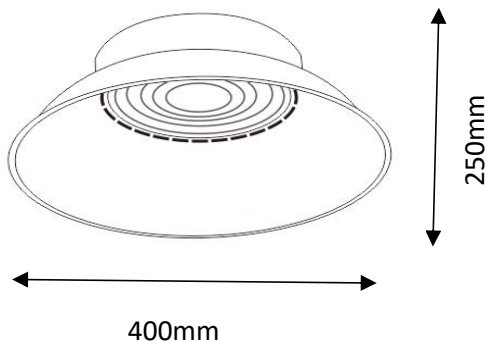

Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°


Light control

DALI

Construction

- *Thick cast aluminum material, fast heat dissipation
- *Thick tempered lens mask, explosion-proof, pressure resistant, and high-temperature resistant
- *Integrated sealing ring design

Photometrics

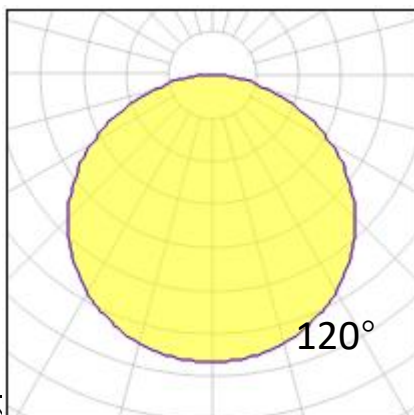

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications

