


## Inground light

Product Code  
**OPTOIL1CR15W220V**



IP rating	67
Ik rating	10
Source type	High power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>80
Step McAdam	3
Source flux	1800 lm
Source efficiency	120 lm/W
Delivered flux	1200 lm
Delivered efficiency	80 lm/W
Input power	15W
Supply voltage	220V AC
Insulation Class	insulation class III
Power supply	Built in constant current
Material	aluminium+304 stainless steel
Light colour/CCT	3000K/3500K/4000K/6000K
Beam angle	15°/24°/36°/60°
Mounting	in-ground embedded
Reflector color	black
Finishing	silvery

## Technical drawing

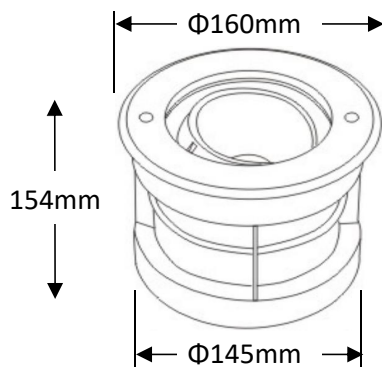

## Temperature limits

Working temperature	-30°C to +50°C
Storage temperature	-50°C to +80°C

## Light control

ON/off

## Construction

Die cast aluminum lamp body, stainless steel cover, tempered glass, dual waterproofing of structural waterproofing and adhesive waterproofing, adjustable angle  $\pm 15^\circ$


## Photometrics



## Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

## Specifications



## OPTILUX LIGHTING

Optilux reserves the right to make changes to this product at any time without notice and such change will be effective immediately.  
Copyright © 2024 FANGTIAN TECHNOLOGY LLC.