


Weather proof Linear Light

Product Code
ARCIWLPLL1A30W220V



IP rating	65
Ik rating	5
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>80
Step McAdam	3
Source flux	3300 lm
Source efficiency	110 lm/W
Delivered flux	3000 lm
Delivered efficiency	100 lm/W
Input power	30W
Supply voltage	220~240V AC
Insulation Class	Class I
Power supply	Built in constant current driver
Material	ABS+PC
Light colour/CCT	3000K
Beam angle	180°
Mounting	surface mount
Reflector color	-
Finishing	warm white

Technical drawing

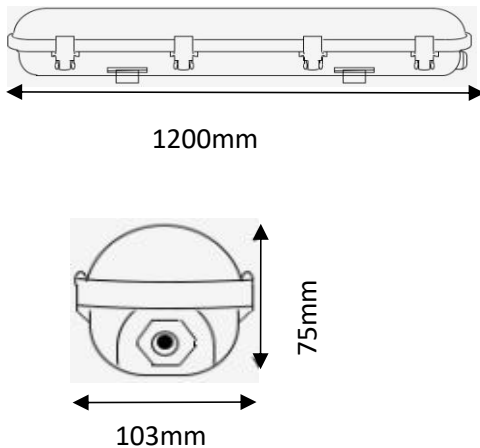

Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°


Light control

ON/off

Construction

Die cast aluminum shell, surface sandblasting treatment, tempered glass, stainless steel screws

Photometrics

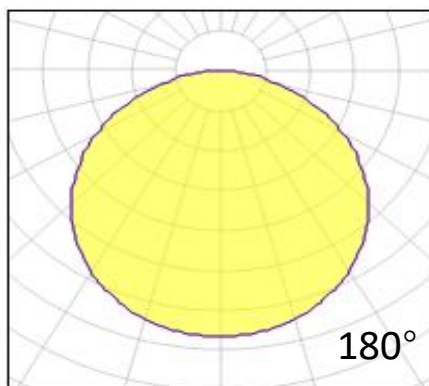

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications

