


T8 light tube

Product Code
OPTIT8LT12W220V



IP rating	40
Ik rating	6
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>80
Step McAdam	3
Source flux	1680 lm
Source efficiency	140 lm/W
Delivered flux	1440 lm
Delivered efficiency	120 lm/W
Input power	12W
Supply voltage	220~240V AC
Insulation Class	insulation class III
Power supply	Built in constant current
Material	aluminum+PC
Light colour/CCT	3000K/4000K/6000K
Beam angle	diffuse
Mounting	T8 bracket
Reflector color	-
Finishing	silvery

Technical drawing



Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°


Light control

ON/off,DALI,Microwave Radar

Construction

Aluminum shell, high transparency PC lampshade, not prone to yellowing, built-in constant current drive, long service life

Photometrics

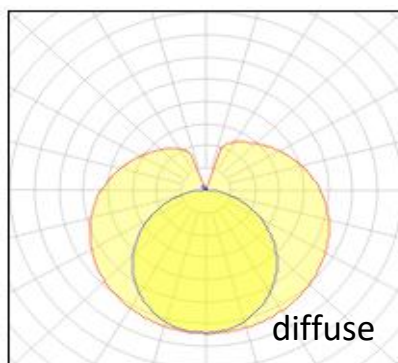

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications

