

## Street light

Product Code  
ARCOSL3A30W220V



IP rating	65
Ik rating	8
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>80
Step McAdam	3
Source flux	3900 lm
Source efficiency	130 lm/W
Delivered flux	3900 lm
Delivered efficiency	130 lm/W
Input power	30 W
Supply voltage	AC 220V
Insulation Class	Class I
Power supply	Built in constant current driver
Material	aluminum+PC
Light colour/CCT	3000K
Beam angle	120°
Mounting	surface mount
Reflector color	/
Finishing	grey

## Technical drawing



## Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°


## Light control

ON/off,

## Construction

Made of die-cast aluminum and featuring a PC lampshade. Its unique design ensures a soft and even light distribution.

## Photometrics

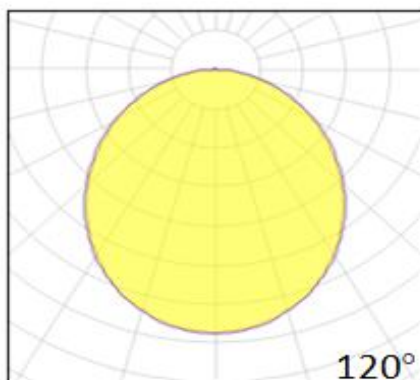

## Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

## Specifications

