


Urbanlight

Product Code
ARCOBL4A60W220V



IP rating	65
Ik rating	8
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>80
Step McAdam	3
Source flux	7800 lm
Source efficiency	130 lm/W
Delivered flux	7800 lm
Delivered efficiency	130 lm/W
Input power	60 W
Supply voltage	220~240V AC
Insulation Class	insulation class I
Power supply	Lifud driver constant current
Material	Aluminum and tempered glass
Light colour/CCT	3000K
Beam angle	60°/120°
Mounting	surface mount
Reflector color	-
Finishing	grey

Technical drawing

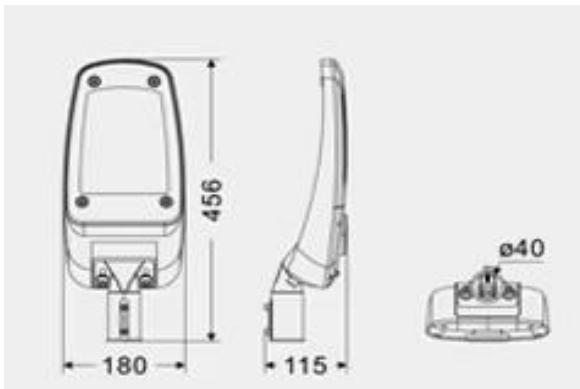

Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°



Light control

ON/off,

Construction

with a die-cast aluminum lamp housing and the latest European standard streetlight head, now features an adjustable lamp head angle.

Photometrics



Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications

