


Emergency light

Product Code
ARCIEL2A3W220V



IP rating	20
Ik rating	5
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>80
Step McAdam	3
Source flux	300 lm
Source efficiency	100 lm/W
Delivered flux	300 lm
Delivered efficiency	100 lm/W
Input power	3 W
Supply voltage	AC 220V
Insulation Class	insulation class III
Power supply	Built in constant current driver
Material	Acrylic
Light colour/CCT	3000K
Beam angle	120°
Mounting	surface mount
Reflector color	/
Finishing	white

Technical drawing

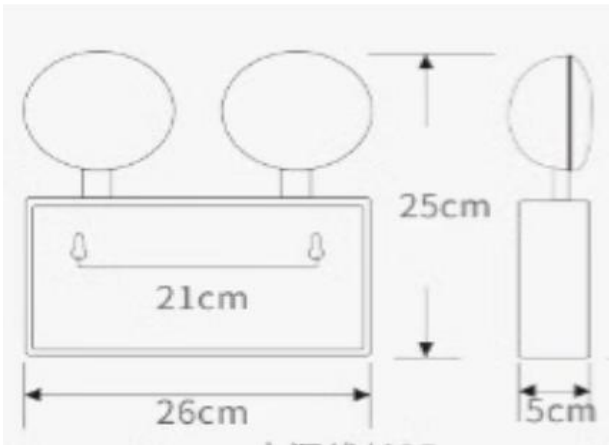

Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°


Light control

ON/off,

Construction

PMMA material face mask, LED chip, using fire-resistant material

Photometrics

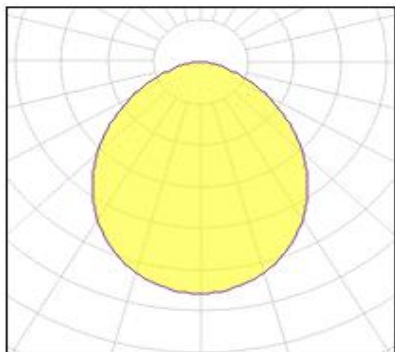

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications

