

Datasheet

A60 Bulbs


Product Code

OPTIA60W7PA220V


OPTIA60W7PA220VD



Technical drawing

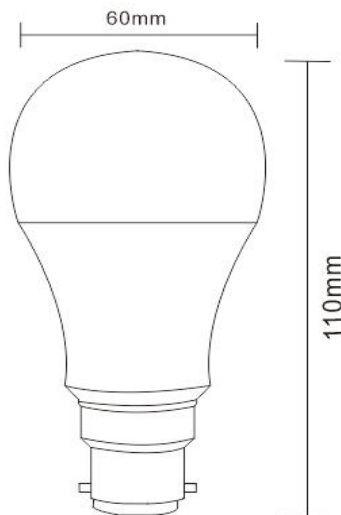

Photometrics

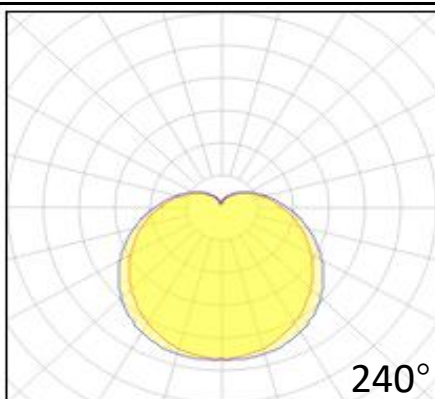

IP rating	20
Ik rating	6
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>80
Step McAdam	3
Source flux	980 lm
Source efficiency	140 lm/W
Delivered flux	770 lm
Delivered efficiency	110 lm/W
Input power	7W
Supply voltage	AC 100-240V
Insulation Class	insulation class III
Power supply	Built in constant current
Material	Plastic aluminum
Light colour/CCT	2700K/3000K/4000K/6000K
Beam angle	240°
Base	E26/E27/B22
Reflector color	-
Finishing	white

Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°

Light control

ON/off,Phase dimming


Construction

The outermost shell is made of plastic, the inside is made of aluminum, and the PC diffusion lampshade

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications



OPTILUX LIGHTING

Optilux reserves the right to make changes to this product at any time without notice and such change will be effective immediately.
Copyright © 2024 FANGTIAN TECHNOLOGY LLC.