

## Datasheet


A60 Filament

Product Code  
OPTIA60W8PA220V  
OPTIA60W8PA220VD



<b>IP rating</b>	20
<b>Ik rating</b>	0
<b>Source type</b>	High power LED
<b>Source life time</b>	>50,000h at 25°C ambient temperature
<b>CRI</b>	>80
<b>Step McAdam</b>	3
<b>Source flux</b>	1120 lm
<b>Source efficiency</b>	140 lm/W
<b>Delivered flux</b>	880 lm
<b>Delivered efficiency</b>	110 lm/W
<b>Input power</b>	8W
<b>Supply voltage</b>	AC 100-240V
<b>Insulation Class</b>	insulation class III
<b>Power supply</b>	Built in constant current
<b>Material</b>	Glass
<b>Light colour/CCT</b>	2700K/3000K/4000K/6000K
<b>Beam angle</b>	360°
<b>Base</b>	E26/E27
<b>Reflector color</b>	-
<b>Finishing</b>	white

## Technical drawing

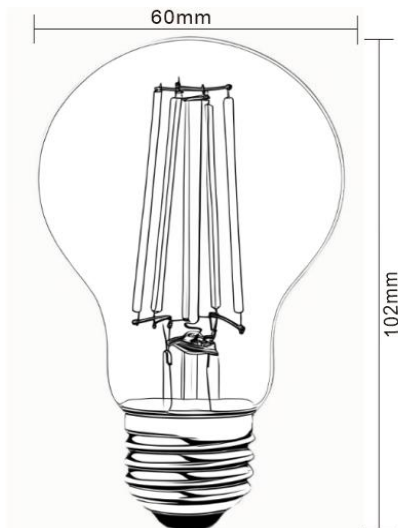

## Temperature limits

<b>Working temperature</b>	-30°C to +50°C
<b>Storage temperature</b>	-50°C to +80°C


## Light control

ON/off, Phase dimming

## Construction

The outermost shell is made of plastic, the inside is made of aluminum, and the PC diffusion lampshade


## Photometrics

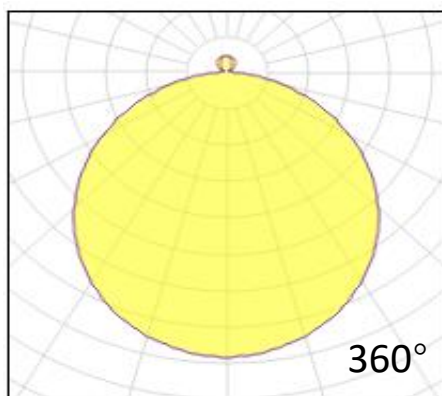

## Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

## Specifications



OPTILUX LIGHTING

Optilux reserves the right to make changes to this product at any time without notice and such change will be effective immediately.  
Copyright © 2024 FANGTIAN TECHNOLOGY LLC.