

Handrail Light

Product Code
OPTOHL1A1W24V
OPTOHL1A1W24VD



IP rating	67
Ik rating	8
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>80
Step McAdam	3
Source flux	120 lm
Source efficiency	120 lm/W
Delivered flux	110 lm
Delivered efficiency	110 lm/W
Input power	1W
Supply voltage	DC24V
Insulation Class	insulation class III
Power supply	Built in constant current driver
Material	304 stainless steel
Light colour/CCT	3000K/4000K/6000K
Beam angle	45°
Mounting	Track installation
Reflector color	silvery
Finishing	silvery

Technical drawing



Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°


Light control

ON/off, optional DALI dimming

Construction

304 stainless steel

Photometrics

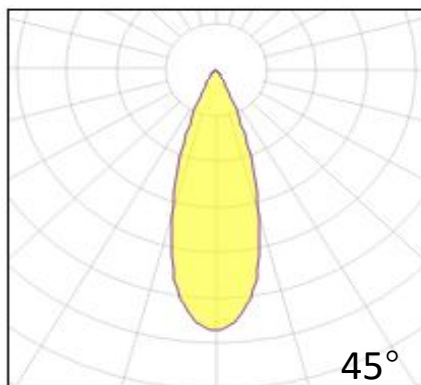

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications

