


Panel Light


Product Code

ARCIPL2A25W220V

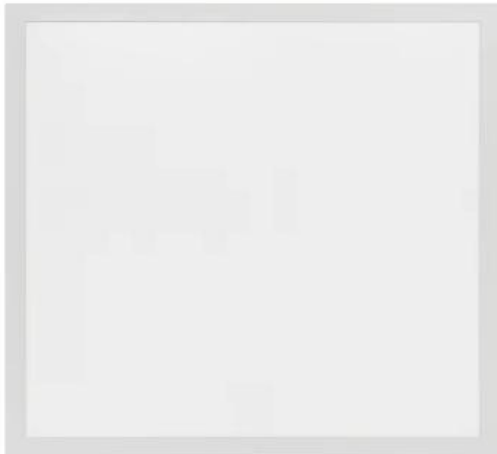

IP rating	54
Ik rating	8
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>80
Step McAdam	3
Source flux	3000 lm
Source efficiency	120 lm/W
Delivered flux	2500 lm
Delivered efficiency	100 lm/W
Input power	25 W
Supply voltage	AC 220V
Insulation Class	insulation class I
Power supply	Built in constant current driver
Material	aluminum+PC
Light colour/CCT	6000K
Beam angle	120°
Mounting	ceiling-recessed
Reflector color	/
Finishing	White

Technical drawing

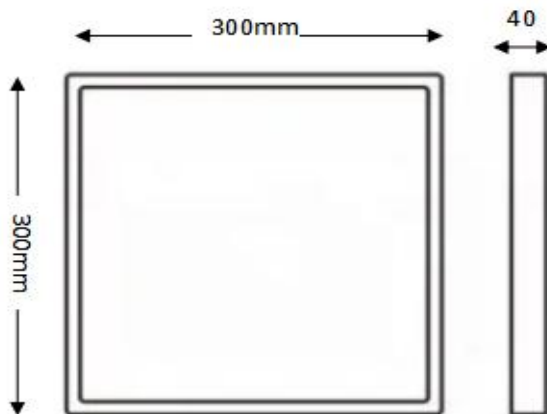

Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°


Light control

ON/off,

Construction

Aluminum frame, PS diffusion plate, iron bottom surface with high-temperature baked paint, Aluminum PCB+LED ChipS+PMMA LENS

Photometrics

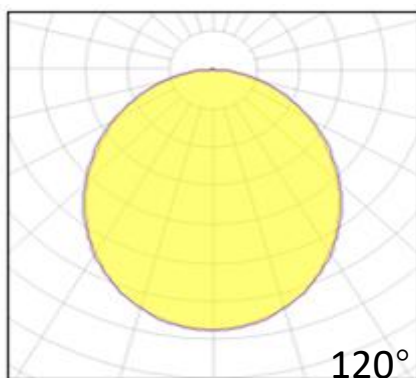

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications

