


## Path light

Product Code  
ARCOPL3BR50W220V  
ARCOPL3BR50W220VD



IP rating	65
Ik rating	8
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>90
Step McAdam	3
Source flux	6000 lm
Source efficiency	120 lm/W
Delivered flux	4000 lm
Delivered efficiency	100 lm/W
Input power	50 W
Supply voltage	AC 220V
Insulation Class	insulation class III
Power supply	built-in driver constant current
Material	aluminum
Light colour/CCT	4000K
Beam angle	120°
Mounting	post top
Reflector color	/
Finishing	Matte black

## Technical drawing

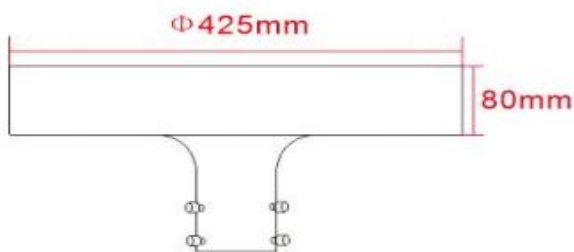

## Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°


## Light control

ON/off,optional DALI dimming

## Construction

Using aluminum and PC materials

## Photometrics

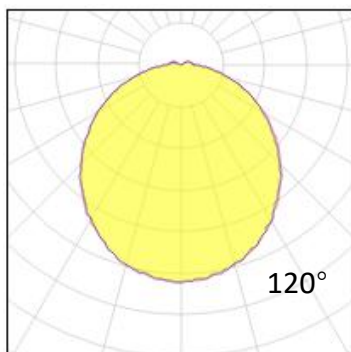

## Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

## Specifications

