

## Square spotlight


Product Code

**OPTOSL42CS16\*2W220VB**



IP rating	67
Ik rating	8
Source type	High power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>90
Step McAdam	3
Source flux	3840 lm
Source efficiency	120 lm/W
Delivered flux	2560 lm
Delivered efficiency	80 lm/W
Input power	32W
Supply voltage	110~240V AC
Insulation Class	insulation class III
Power supply	Built in constant current
Material	aluminium
Light colour/CCT	3000K/4000K/6000K
Beam angle	15°/24°/36°/60°
Mounting	surface mount
Reflector color	black
Finishing	Grey/Black

## Technical drawing

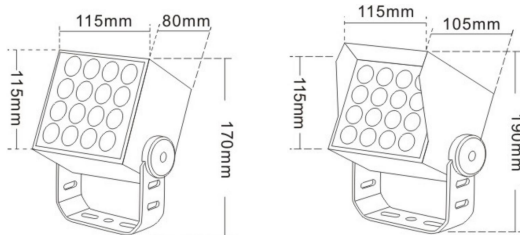

## Temperature limits

Working temperature	-30°C to +50°C
Storage temperature	-50°C to +80°C


## Light control

ON/off

## Construction

Die cast aluminum shell, surface sandblasting treatment, anti-corrosion and rust prevention, adjustable bracket, tempered glass, stainless steel screws


## Photometrics

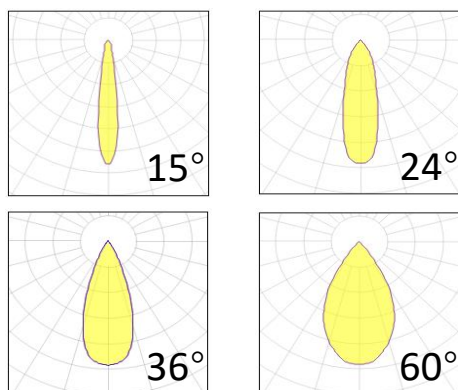

## Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

## Specifications



OPTILUX LIGHTING

Optilux reserves the right to make changes to this product at any time without notice and such change will be effective immediately.  
Copyright © 2024 FANGTIAN TECHNOLOGY LLC.