



Wall Washer

Product Code
OPTOWW382024V



| | |
|----------------------|--------------------------------------|
| IP rating | 66 |
| Ik rating | 8 |
| Source type | Hight power LED |
| Source life time | >50,000h at 25°C ambient temperature |
| CRI | >80 |
| Step McAdam | 3 |
| Source flux | 2160 lm |
| Source efficiency | 120 lm/W |
| Delivered flux | 1620lm |
| Delivered efficiency | 90 lm/W |
| Input power | 18W |
| Supply voltage | DC24V |
| Insulation Class | insulation class III |
| Power supply | Built in constant current |
| Material | Aluminum+tempered glass |
| Light colour/CCT | 3000K/4000K/6000K/RGB/RGBW |
| Beam angle | 15°/30°/60°/10X60° |
| Mounting | surface mount |
| Reflector color | - |
| Finishing | Grey |

Technical drawing



Temperature limits

| | |
|---------------------|----------------|
| Working temperature | -30C° to +50C° |
| Storage temperature | -50C° to +80C° |


Light control

ON/off,DMX 512

Construction

Aluminum lamp body, tempered glass face mask; The lens angle can be selected; The protection level reaches IP66; Surface anodizing or powder electrostatic spraying, the appearance can be customized according to the color of the curtain wall, allowing the product to better integrate into the building.

Photometrics

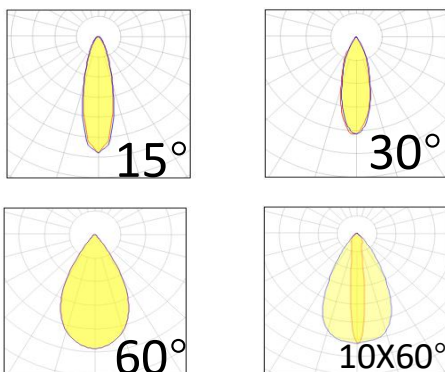

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications

