


Wall Washer

Product Code
OPTOWW422524V



IP rating	66
Ik rating	8
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>80
Step McAdam	3
Source flux	2880 lm
Source efficiency	120 lm/W
Delivered flux	2160lm
Delivered efficiency	90 lm/W
Input power	24W
Supply voltage	DC24V
Insulation Class	insulation class III
Power supply	Built in constant current
Material	Aluminum+tempered glass
Light colour/CCT	3000K/4000K/6000K/RGB/RGBW
Beam angle	15°/30°/60°/10X60°
Mounting	surface mount
Reflector color	-
Finishing	Grey

Technical drawing

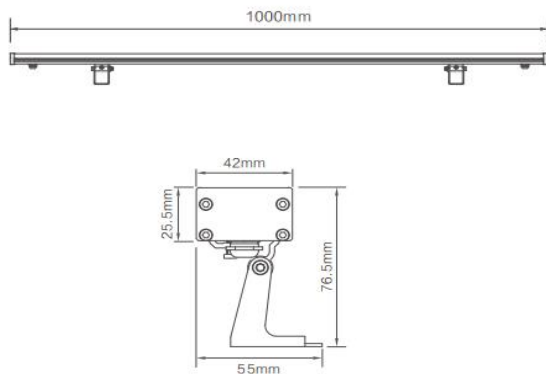

Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°


Light control

ON/off,DMX 512

Construction

Aluminum lamp body, tempered glass face mask; The lens angle can be selected; The protection level reaches IP66; Surface anodizing or powder electrostatic spraying, the appearance can be customized according to the color of the curtain wall, allowing the product to better integrate into the building.

Photometrics

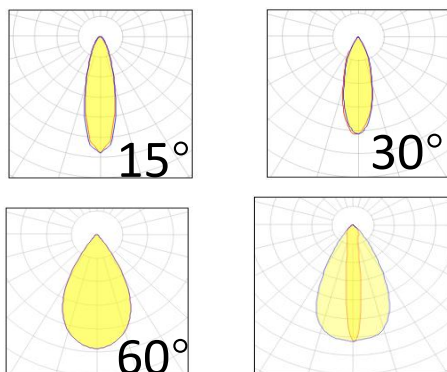


Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications

10X60°



OPTILUX LIGHTING

Optilux reserves the right to make changes to this product at any time without notice and such change will be effective immediately.
Copyright © 2024 FANGTIAN TECHNOLOGY LLC.