

Surface Mounted Ceiling Light

Product Code


ARCISMCL1AR20W220V

ARCISMCL1AR20W220VD



IP rating	65
Ik rating	8
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>80
Step McAdam	3
Source flux	2400 lm
Source efficiency	120 lm/W
Delivered flux	2000 lm
Delivered efficiency	100 lm/W
Input power	20W
Supply voltage	110~240V AC
Insulation Class	insulation class III
Power supply	Lifud driver constant current
Material	aluminium+PC
Light colour/CCT	2700K/3000K/4000K/6000K
Beam angle	diffuse
Mounting	surface mount
Reflector color	-
Finishing	white/black/grey

Technical drawing

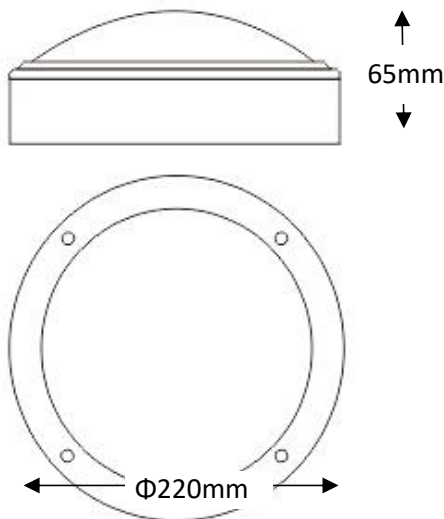

Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°


Light control

ON/off,optional DALI dimming

Construction

Die cast aluminum shell, matte painted surface, anti-corrosion and rust proof, tough PC material lampshade, not easily damaged, IP65 structure waterproof


Photometrics

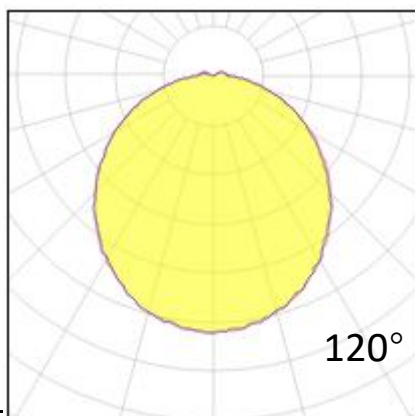

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications



OPTILUX LIGHTING

Optilux reserves the right to make changes to this product at any time without notice and such change will be effective immediately.
Copyright © 2024 FANGTIAN TECHNOLOGY LLC.