

Surface Mounted Ceiling Light

Product Code


ARCISMCL1AR30W220V

ARCISMCL1AR30W220VD



| | |
|----------------------|--------------------------------------|
| IP rating | 65 |
| Ik rating | 8 |
| Source type | Hight power LED |
| Source life time | >50,000h at 25°C ambient temperature |
| CRI | >80 |
| Step McAdam | 3 |
| Source flux | 3600 lm |
| Source efficiency | 120 lm/W |
| Delivered flux | 3000 lm |
| Delivered efficiency | 100 lm/W |
| Input power | 30W |
| Supply voltage | 100~240V AC |
| Insulation Class | insulation class III |
| Power supply | Lifud driver constant current |
| Material | aluminium+PC |
| Light colour/CCT | 2700K/3000K/4000K/6000K |
| Beam angle | diffuse |
| Mounting | surface mount |
| Reflector color | - |
| Finishing | white/black/grey |

Technical drawing

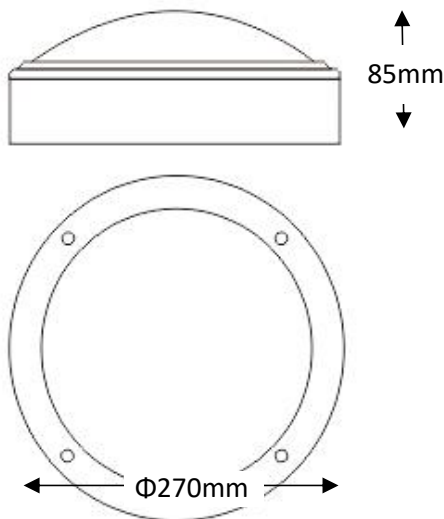

Temperature limits

| | |
|---------------------|----------------|
| Working temperature | -30C° to +50C° |
| Storage temperature | -50C° to +80C° |


Light control

ON/off,optional DALI dimming

Construction

Die cast aluminum shell, matte painted surface, anti-corrosion and rust proof, tough PC material lampshade, not easily damaged, IP65 structure waterproof


Photometrics

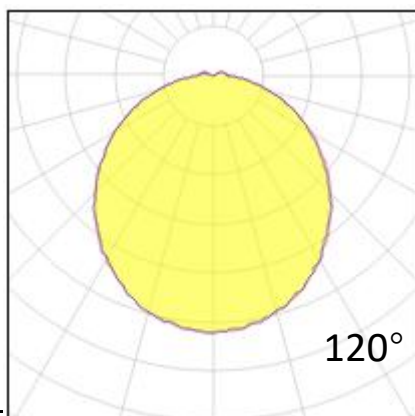

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications



OPTILUX LIGHTING

Optilux reserves the right to make changes to this product at any time without notice and such change will be effective immediately.
Copyright © 2024 FANGTIAN TECHNOLOGY LLC.