


Pendant light

Product Code
OPTIPL1A15W220V
OPTIPL1A15W220VD



IP rating	54
Ik rating	8
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>90
Step McAdam	3
Source flux	1800 lm
Source efficiency	120 lm/W
Delivered flux	1200 lm
Delivered efficiency	80 lm/W
Input power	15W
Supply voltage	220V AC
Insulation Class	insulation class III
Power supply	Lifud driver constant current
Material	aluminum
Light colour/CCT	3000K/4000K/6000K
Beam angle	60°/diffuse
Mounting	surface mount
Reflector color	-
Finishing	white and black

Technical drawing

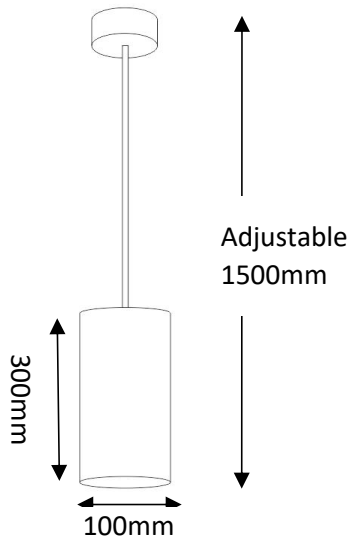

Temperature limits

Working temperature	-30°C to +50°C
Storage temperature	-50°C to +80°C


Light control

on/off, optional DALI dimming

Construction

Aluminum lamp body, surface baked paint treatment, optional spotlight or diffuser style

Photometrics

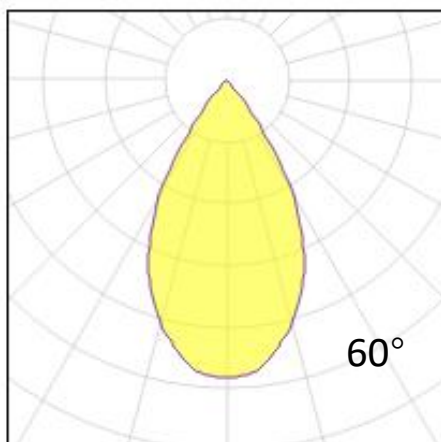

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications

