


## LED Profile Light

Product Code  
**ARCIPL3A10W24V**



<b>IP rating</b>	20
<b>Ik rating</b>	6
<b>Source type</b>	High power LED
<b>Source life time</b>	>50,000h at 25°C ambient temperature
<b>CRI</b>	>80
<b>Step McAdam</b>	3
<b>Source flux</b>	1200 lm
<b>Source efficiency</b>	120 lm/W
<b>Delivered flux</b>	1000 lm
<b>Delivered efficiency</b>	100 lm/W
<b>Input power</b>	10W/M
<b>Supply voltage</b>	DC24V
<b>Insulation Class</b>	insulation class III
<b>Power supply</b>	constant voltage driver
<b>Material</b>	aluminium+PC
<b>Light colour/CCT</b>	2700K/3000K/4000K/6000K
<b>Beam angle</b>	diffuse
<b>Mounting</b>	recessed/surface mount
<b>Reflector color</b>	-
<b>Finishing</b>	black/silvery

## Technical drawing



## Temperature limits

<b>Working temperature</b>	-30°C to +50°C
<b>Storage temperature</b>	-50°C to +80°C


## Light control

ON/off, optional DALI dimming

## Construction

Aluminum shell, anodized, rust and corrosion resistant, fast heat dissipation, PC lampshade, stainless steel buckle, can be cut according to requirements

## Photometrics

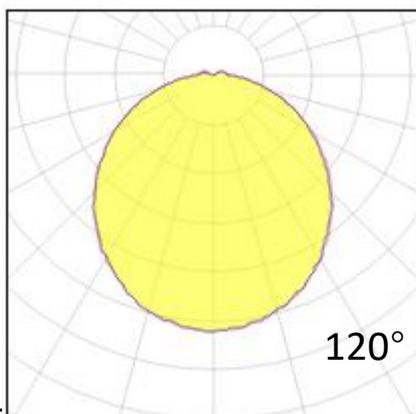

## Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

## Specifications

