


LED Profile Light

Product Code
ARCIPL1BA10W24V



IP rating	20
Ik rating	6
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>80
Step McAdam	3
Source flux	1200 lm
Source efficiency	120 lm/W
Delivered flux	1000 lm
Delivered efficiency	100 lm/W
Input power	10W/M
Supply voltage	DC24V
Insulation Class	insulation class III
Power supply	constant voltage driver
Material	aluminium+PC
Light colour/CCT	2700K/3000K/4000K/6000K
Beam angle	diffuse
Mounting	recessed/surface mount
Reflector color	-
Finishing	black/silvery

Technical drawing

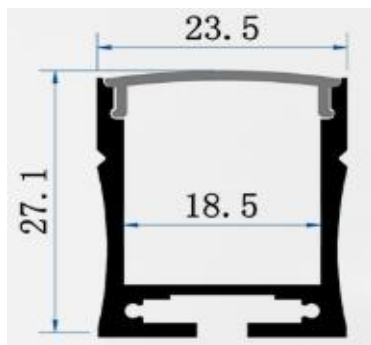

Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°


Light control

ON/off, optional DALI dimming

Construction

Aluminum shell, anodized, rust and corrosion resistant, fast heat dissipation, PC lampshade, stainless steel buckle, can be cut according to requirements


Photometrics

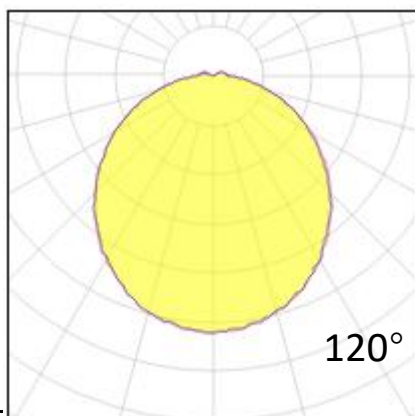

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications



OPTILUX LIGHTING

Optilux reserves the right to make changes to this product at any time without notice and such change will be effective immediately.
Copyright © 2024 FANGTIAN TECHNOLOGY LLC.