


## Strip light

Product Code  
OPTISLSB480P12W24V  
OPTISLSB480P12W24VD



IP rating	20
Ik rating	3
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>90
Step McAdam	3
Source flux	1440 lm
Source efficiency	120 lm/W
Delivered flux	1200 lm
Delivered efficiency	100 lm/W
Input power	12W
Supply voltage	24V DC
Insulation Class	insulation class III
Power supply	-
Material	Flexible Printed Circuit
Light colour/CCT	2700K/3000K/4000K/6000K
Beam angle	120°
Mounting	surface mount
LED Qty	480

## Technical drawing

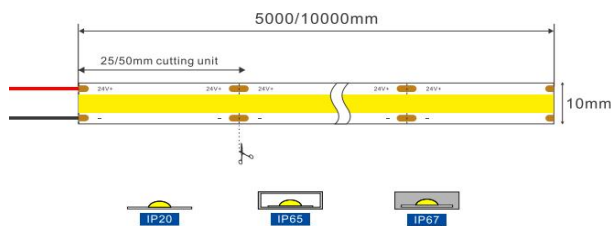

## Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°


## Light control

ON/off, optional DALI dimming

## Construction

Flexible Printed Circuit, Double sided adhesive tape on the back of the light strip

## Photometrics



## Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

## Specifications

