


Pendant light

Product Code
OPTIPL1AR15W220V
OPTIPL1AR15W220VD



| | |
|-----------------------------|--------------------------------------|
| IP rating | 40 |
| Ik rating | 0 |
| Source type | Hight power LED |
| Source life time | >50,000h at 25°C ambient temperature |
| CRI | >80 |
| Step McAdam | 3 |
| Source flux | 1800 lm |
| Source efficiency | 120 lm/W |
| Delivered flux | 1050 lm |
| Delivered efficiency | 70 lm/W |
| Input power | 15W |
| Supply voltage | 100~240V AC |
| Insulation Class | insulation class III |
| Power supply | Built in constant current |
| Material | tempering glass+aluminium |
| Light colour/CCT | 3000K/4000K/6000K |
| Beam angle | diffuse reflection |
| Mounting | hanging installation |
| Reflector color | - |
| Finishing | black translucent glass |

Technical drawing

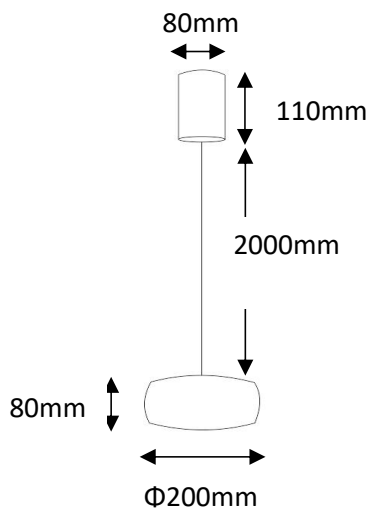

Temperature limits

| | |
|----------------------------|----------------|
| Working temperature | -30C° to +50C° |
| Storage temperature | -50C° to +80C° |


Light control

ON/off,Optional dimming and color temperature adjustment

Construction

The lamp body is made of high-purity aluminum profile casting, which can effectively transfer heat. The outer shell is made of black transparent tempered glass, with a simple and beautiful appearance

Photometrics

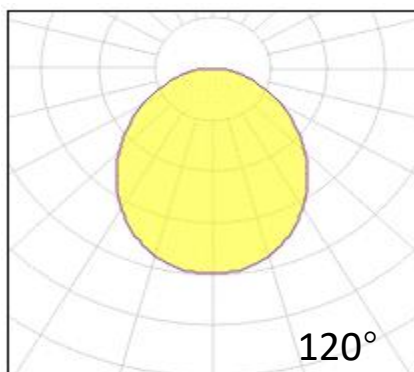

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications

