

## Surface Mounted Wall Light

Product Code


**OPTISMWL2AR12W220V**

**OPTISMWL2AR12W220VD**



IP rating	65
Ik rating	8
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>80
Step McAdam	3
Source flux	1440 lm
Source efficiency	120 lm/W
Delivered flux	1200 lm
Delivered efficiency	100 lm/W
Input power	12W
Supply voltage	220~240V AC
Insulation Class	insulation class III
Power supply	Lifud driver constant current
Material	aluminium+PC
Light colour/CCT	2700K/3000K/4000K/6000K
Beam angle	120°
Mounting	surface mount
Reflector color	-
Finishing	white/black/grey

## Technical drawing

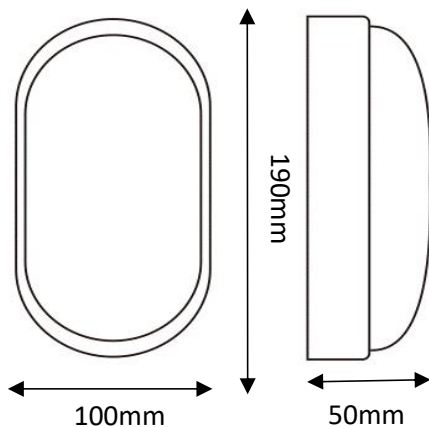

## Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°


## Light control

ON/off,optional DALI dimming

## Construction

Die cast aluminum shell, matte painted surface, anti-corrosion and rust proof, tough PC material lampshade, not easily damaged, IP65 structure waterproof


## Photometrics

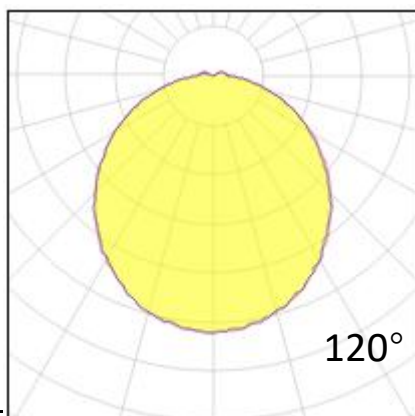

## Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

## Specifications



OPTILUX LIGHTING

Optilux reserves the right to make changes to this product at any time without notice and such change will be effective immediately.  
Copyright © 2024 FANGTIAN TECHNOLOGY LLC.