

Outdoor Wall Light

Product Code


OPTOWL1AS18W220V

OPTOWL1AS18W220VD



IP rating	65
Ik rating	8
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>80
Step McAdam	3
Source flux	2160 lm
Source efficiency	120 lm/W
Delivered flux	1620 lm
Delivered efficiency	90 lm/W
Input power	18W
Supply voltage	100~240V AC
Insulation Class	insulation class III
Power supply	Lifud driver constant current
Material	aluminium+PC
Light colour/CCT	2700K/3000K/4000K/6000K
Beam angle	-
Mounting	surface mount
Reflector color	-
Finishing	white/black/grey

Technical drawing

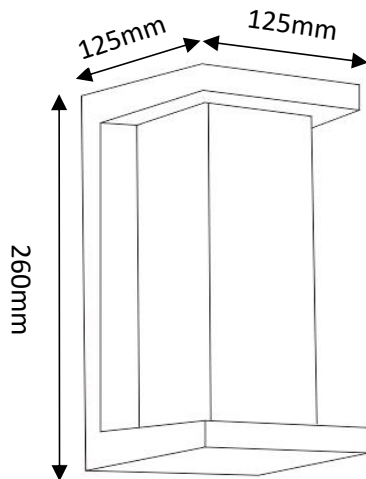

Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°


Light control

ON/off,optional DALI dimming

Construction

Die cast aluminum shell, matte painted surface, anti-corrosion and rust proof, tough PC material lampshade, not easily damaged, IP65 structure waterproof

Photometrics

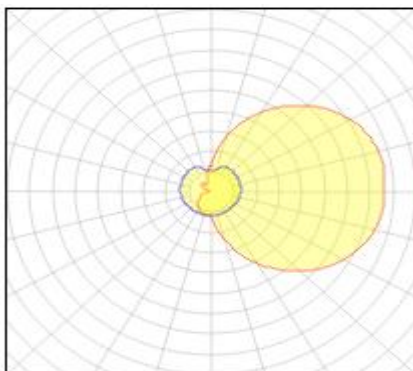

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications

