


## Vapor Proof Light

Product Code  
**OPTIVPL2A44W220V**



IP rating	65
Ik rating	6
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>80
Step McAdam	3
Source flux	5280 lm
Source efficiency	120 lm/W
Delivered flux	4400 lm
Delivered efficiency	100 lm/W
Input power	2*22W
Supply voltage	AC 110~240V
Insulation Class	insulation class III
Power supply	Built in constant current driver
Material	ABS+PC
Light colour/CCT	3000K/4000K/6000K
Beam angle	diffuse
Mounting	surface mount
Reflector color	-
Finishing	Grey

### Technical drawing

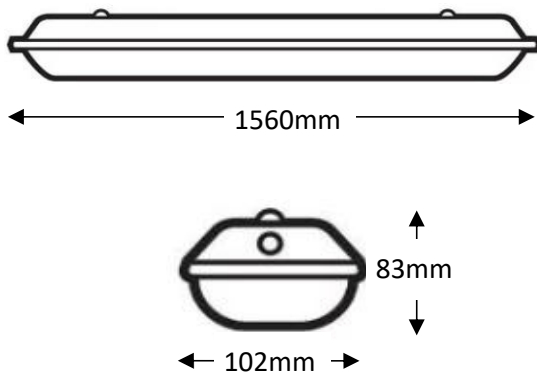

### Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°


### Light control

ON/off, optional DALI dimming

### Construction

ABS bottom shell, PC striped lampshade, silicone sealing ring

### Photometrics

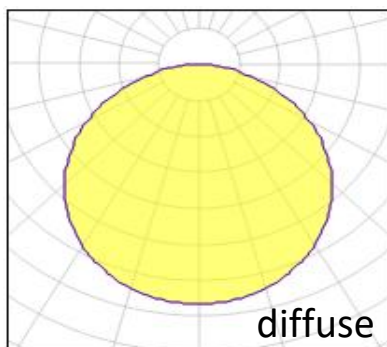

### Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

### Specifications

