

Wall Light


Product Code

OPTIWL2AR10W220V


OPTIWL2AR10W220VD



Technical drawing

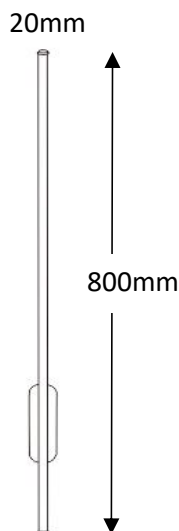

Photometrics

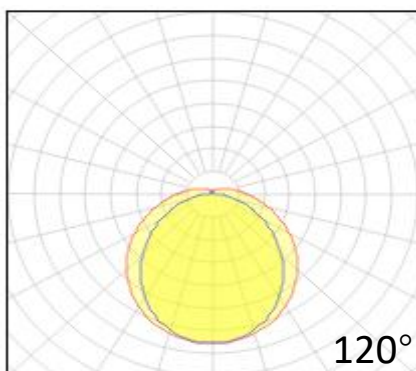

IP rating	54
Ik rating	8
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>90
Step McAdam	3
Source flux	120 lm
Source efficiency	120 lm/W
Delivered flux	800 lm
Delivered efficiency	80 lm/W
Input power	10W
Supply voltage	110~240V AC
Insulation Class	insulation class III
Power supply	Built in constant current driver
Material	Aluminium+PC
Light colour/CCT	2700K/3000K/4000K/6000K
Beam angle	-
Mounting	surface mount
Reflector color	-
Finishing	brass/black

Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°

Light control

ON/off

Construction

Brass lamp holder, surface treated with anti-oxidation, moisture-proof and anti-corrosion, PC diffuse reflective lampshade with soft light

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications

