

Wall Light

Product Code


OPTIWL4AS12W220V

OPTIWL4AS12W220VD




IP rating	65
Ik rating	8
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>80
Step McAdam	3
Source flux	1440 lm
Source efficiency	120 lm/W
Delivered flux	960 lm
Delivered efficiency	80 lm/W
Input power	12W
Supply voltage	220~240V AC
Insulation Class	insulation class III
Power supply	Built in constant current driver
Material	aluminum
Light colour/CCT	3000K
Beam angle	diffuse
Mounting	surface mount
Reflector color	-
Finishing	Black

Technical drawing

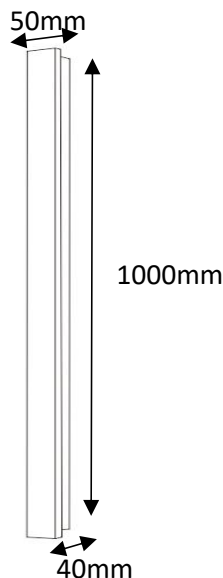

Photometrics



Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°

Light control

ON/OFF

Construction

Die cast aluminum shell, surface sandblasting treatment, Double layer acrylic lampshade, stainless steel screws

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications

