

Surface Mounted Ceiling Light

Product Code


OPTISMCL2BS96W220V

OPTISMCL2BS96W220VD



IP rating	54
Ik rating	6
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>95
Step McAdam	3
Source flux	11520 lm
Source efficiency	120 lm/W
Delivered flux	9600 lm
Delivered efficiency	100 lm/W
Input power	96W
Supply voltage	110~240V AC
Insulation Class	insulation class III
Power supply	constant current driver
Material	Iron+PC
Light colour/CCT	3000K/4000K/6000K
Beam angle	diffuse
Mounting	surface mount
Reflector color	-
Finishing	white

Technical drawing

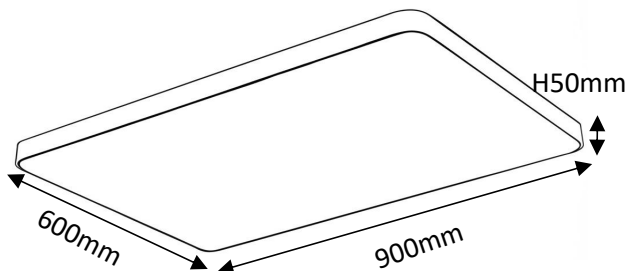

Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°


Light control

ON/off, optional DALI dimming

Construction

This modern minimalist ceiling light features a painted iron frame and a soft PC diffuser for even, non-glaring light. Its simple design suits any modern home.


Photometrics

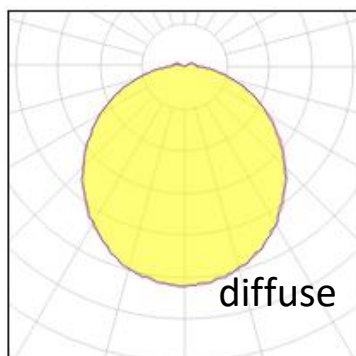

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications



OPTILUX LIGHTING

Optilux reserves the right to make changes to this product at any time without notice and such change will be effective immediately.
Copyright © 2024 FANGTIAN TECHNOLOGY LLC.