


Spike Light

Product Code
OPTOSL1D10W220V



IP rating	65
Ik rating	8
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>90
Step McAdam	3
Source flux	1200 lm
Source efficiency	120 lm/W
Delivered flux	800 lm
Delivered efficiency	80 lm/W
Input power	10W
Supply voltage	AC220~240V
Insulation Class	insulation class I
Power supply	constant current driver
Material	Aluminum
Light colour/CCT	2700K/3000K/4000K/6000K
Beam angle	15°/24°/36°/60°
Mounting	Grounding mount
Reflector color	-
Finishing	Black/Grey

Technical drawing

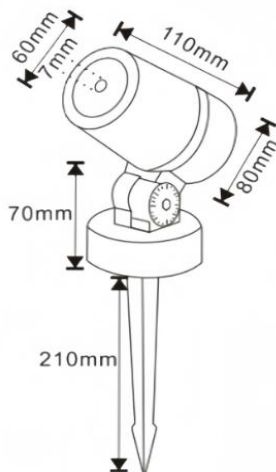

Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°


Light control

ON/OFF,DALI dimming

Construction

Die cast aluminum shell, surface treated with oxidation, tempered glass, stainless steel screws, equipped with adjustable mounting bracket

Photometrics

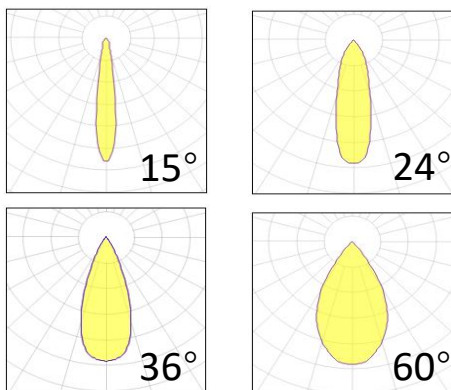

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications

