


Intelligent Mirror

Product Code
OPTIIM4HR15W220VB



IP rating	44
Ik rating	0
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>90
Step McAdam	3
Source flux	1800 lm
Source efficiency	120 lm/W
Delivered flux	1200 lm
Delivered efficiency	80 lm/W
Input power	15W
Supply voltage	110~240V AC
Insulation Class	Insulation class III
Power supply	Built in constant current driver
Material	Aluminum+Glass
Light colour/CCT	3000K/4000K/6000K
Beam angle	Diffuse
Mounting	Wall Mounted
Reflector color	-
Finishing	Gold/Black

Technical drawing

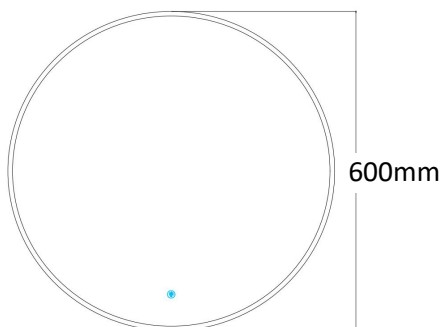

Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°


Light control

Human sensor/Touch sensor

Construction

The intelligent mirror utilizes a tempered glass panel with anti-fog coating, mounted on a rust-proof aluminum alloy frame, ensuring clarity and corrosion resistance in humid environments.

Photometrics



Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications

