


Intelligent Mirror

Product Code
OPTIIM4HR25W220VB



| | |
|-----------------------------|--------------------------------------|
| IP rating | 44 |
| Ik rating | 0 |
| Source type | Hight power LED |
| Source life time | >50,000h at 25°C ambient temperature |
| CRI | >90 |
| Step McAdam | 3 |
| Source flux | 3000 lm |
| Source efficiency | 120 lm/W |
| Delivered flux | 2000 lm |
| Delivered efficiency | 80 lm/W |
| Input power | 15W |
| Supply voltage | 110~240V AC |
| Insulation Class | Insulation class III |
| Power supply | Built in constant current driver |
| Material | Aluminum+Glass |
| Light colour/CCT | 3000K/4000K/6000K |
| Beam angle | Diffuse |
| Mounting | Wall Mounted |
| Reflector color | - |
| Finishing | Gold/Black |

Technical drawing

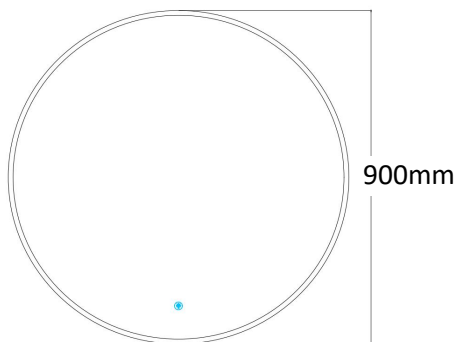

Temperature limits

| | |
|----------------------------|----------------|
| Working temperature | -30C° to +50C° |
| Storage temperature | -50C° to +80C° |


Light control

Human sensor/Touch sensor

Construction

The intelligent mirror utilizes a tempered glass panel with anti-fog coating, mounted on a rust-proof aluminum alloy frame, ensuring clarity and corrosion resistance in humid environments.

Photometrics



Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications

