

Trimless Recessed Spotlight

Product Code


OPTISL3BR20W220VA

OPTISL3BR20W220VAD



IP rating	54
Ik rating	8
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>90
Step McAdam	3
Source flux	2400 lm
Source efficiency	120 lm/W
Delivered flux	1600 lm
Delivered efficiency	80 lm/W
Input power	20W
Supply voltage	110~240V AC
Insulation Class	Insulation class I
Power supply	Lifud driver constant current
Material	Aluminum
Light colour/CCT	3000K/4000K/6000K
Beam angle	15°/24°/36°/60°
Mounting	Ceiling-recessed
Reflector color	Matte Black/Matte White/Sand Silver
Finishing	White and dark grey

Technical drawing

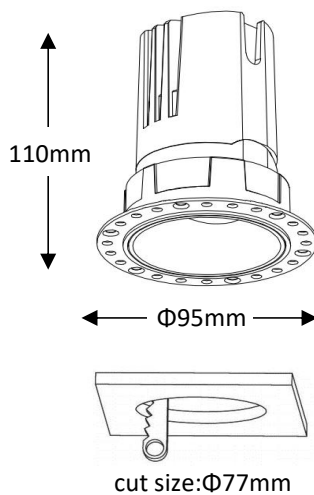

Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°

Light control

ON/off,optional DALI dimming

Construction

- Cast aluminum trim routes heat away from electrical components
- Adjustable, spring loaded retention tabs ensure secure fixture retention
- Certified for direct contact with insulation


Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications

IP 54	IK 08	Ra>90	ON OFF	AC 220V	CE	5 YEAR WARRANTY
-------	-------	-------	-----------	------------	----	-----------------------

Photometrics

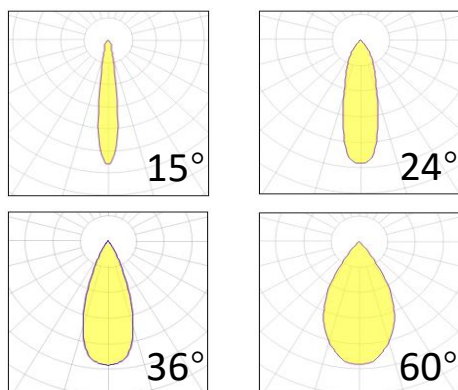

OPTILUX LIGHTING

Optilux reserves the right to make changes to this product at any time without notice and such change will be effective immediately.
Copyright © 2024 FANGTIAN TECHNOLOGY LLC.