


## Wall Down Light

Product Code  
**OPTODL10ER2\*7W220VB**



IP rating	65
Ik rating	8
Source type	High power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>80
Step McAdam	3
Source flux	1680 lm
Source efficiency	120 lm/W
Delivered flux	1120 lm
Delivered efficiency	80 lm/W
Input power	2*7W
Supply voltage	110~240V AC
Insulation Class	insulation class I
Power supply	Built in constant current
Material	Aluminum+Glass Diffuser
Light colour/CCT	2700K-6500K
Beam angle	15°/23°/38°/60°
Mounting	Surface Mounted
Reflector color	Black/White/Silver
Finishing	white/black

## Technical drawing

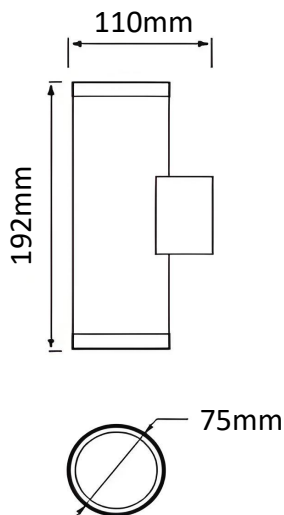

## Temperature limits

Working temperature	-30°C to +50°C
Storage temperature	-50°C to +80°C


## Light control

ON/off,DALI dimming

## Construction

Corrosion resistant die-cast aluminum body. Polyester powder coating, with a pluri-processed against corrosion

## Photometrics

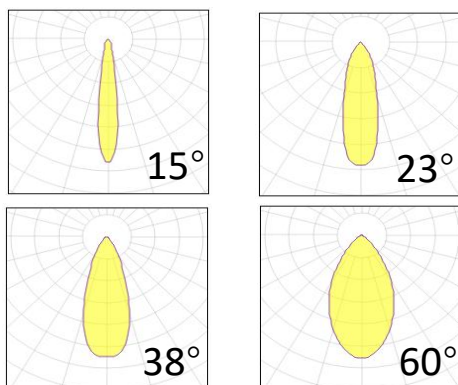

## Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

## Specifications

