


Wall Lights

Product Code
OPTOWL28CS15W220V



IP rating	67
Ik rating	8
Source type	High power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>80
Step McAdam	3
Source flux	1800 lm
Source efficiency	120 lm/W
Delivered flux	1200 lm
Delivered efficiency	80 lm/W
Input power	15W
Supply voltage	110~240V AC
Insulation Class	insulation class III
Power supply	Built in constant current
Material	aluminium
Light colour/CCT	3000K/4000K/6000K
Beam angle	15°/24°/36°/60°
Mounting	surface mount
Reflector color	black
Finishing	Grey/Black

Technical drawing



Temperature limits

Working temperature	-30°C to +50°C
Storage temperature	-50°C to +80°C


Light control

ON/off

Construction

Die cast aluminum shell, surface sandblasting treatment, anti-corrosion and rust prevention, adjustable bracket, tempered glass, stainless steel screws

Photometrics

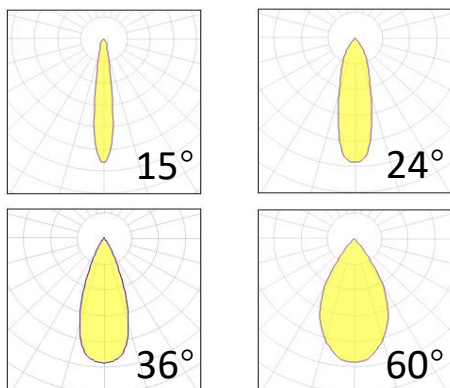

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications



OPTILUX LIGHTING

Optilux reserves the right to make changes to this product at any time without notice and such change will be effective immediately.
Copyright © 2024 FANGTIAN TECHNOLOGY LLC.