



## Pendant light

Product Code  
**OPTIPL1B12W220V**

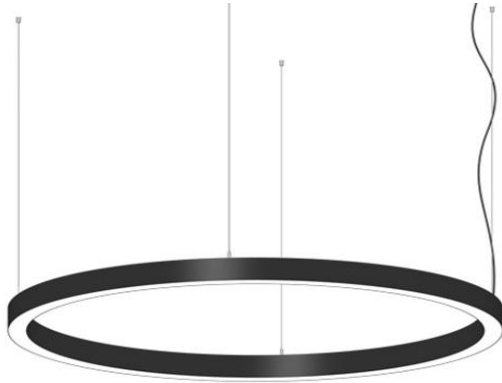

IP rating	54
Ik rating	6
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>90
Step McAdam	3
Source flux	1440 lm
Source efficiency	120 lm/W
Delivered flux	960 lm
Delivered efficiency	80 lm/W
Input power	12W/M
Supply voltage	85-265V AC
Insulation Class	insulation class III
Power supply	Lifud driver constant current
Material	aluminum+PC
Light colour/CCT	3000K/4000K/6000K
Beam angle	diffuse
Mounting	surface mount/Suspended
Reflector color	-
Finishing	white/black

## Technical drawing

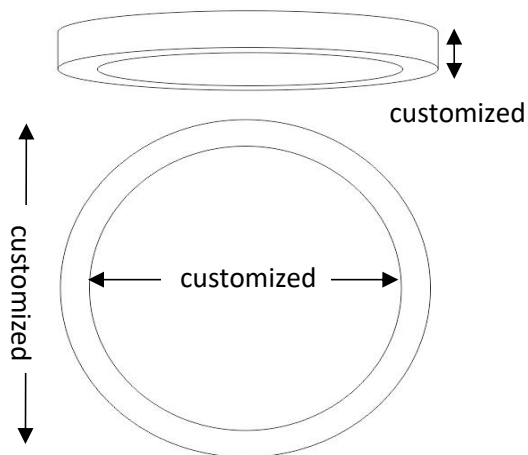

## Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°


## Light control

on/off, optional DALI dimming

## Construction

Aluminum shell, surface baked paint, PC diffusion lampshade, customizable size

## Photometrics

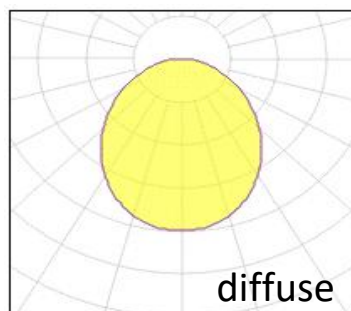

## Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

## Specifications

