


High Bay Light

Product Code
OPTOHBL2GR150W220V



| | |
|----------------------|--------------------------------------|
| IP rating | 65 |
| Ik rating | 8 |
| Source type | Hight power LED |
| Source life time | >50,000h at 25°C ambient temperature |
| CRI | >80 |
| Step McAdam | 3 |
| Source flux | 22500 lm |
| Source efficiency | 150 lm/W |
| Delivered flux | 21000 lm |
| Delivered efficiency | 140 lm/W |
| Input power | 150W |
| Supply voltage | 110~240V AC |
| Insulation Class | insulation class I |
| Power supply | Philips constant current driver |
| Material | aluminum |
| Light colour/CCT | 3000K/4000K/6000K |
| Beam angle | 90° |
| Mounting | Suspension installation |
| Reflector color | - |
| Finishing | black |

Technical drawing

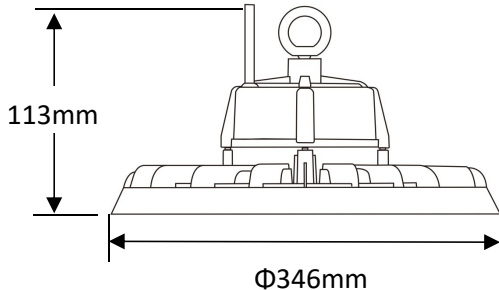

Temperature limits

| | |
|---------------------|----------------|
| Working temperature | -30C° to +50C° |
| Storage temperature | -50C° to +80C° |


Light control

ON/off,DALI dimming

Construction

Die-casting aluminum case,excellent heat dissipation performance, Durable outdoor painting process of the product,excellent quality.anti-corrosion and anti-rusting performance, widely used in different environment

Photometrics



Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications

