


## High Bay Light

Product Code  
**OPTOHBL8GR200W220V**



IP rating	65
Ik rating	8
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>80
Step McAdam	3
Source flux	30000 lm
Source efficiency	150 lm/W
Delivered flux	28000 lm
Delivered efficiency	140 lm/W
Input power	200W
Supply voltage	110~240V AC
Insulation Class	insulation class I
Power supply	Philips constant current driver
Material	aluminum
Light colour/CCT	3000K/4000K/6000K
Beam angle	90°
Mounting	Suspension installation
Reflector color	-
Finishing	black

## Technical drawing

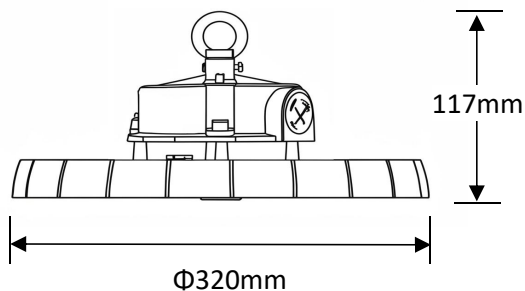

## Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°


## Light control

ON/off,DALI dimming

## Construction

Die-casting aluminum case,excellent heat dissipation performance, Durable outdoor painting process of the product,excellent quality.anti-corrosion and anti-rusting performance, widely used in different environment

## Photometrics



## Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

## Specifications

